


Verti-Drain® 7416

The Verti-Drain® 7416 one of the most versatile aerators in the Redexim range. Capable of working to a depth of 14"/35 cm, the 7416 is well suited to work on sport fields, golf course and other fine turf areas. The tough chassis makes it the ideal Verti-Drain for a range of aeration tasks

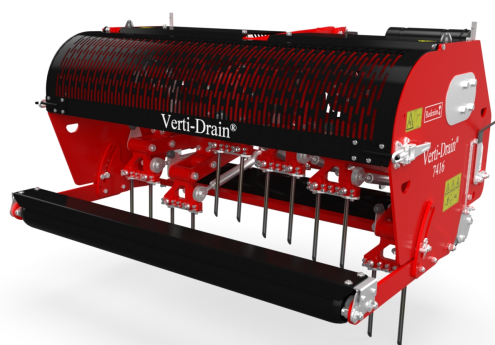

Specifications

SKU	S0001504
Operation	Tractor Mounted
Working width (m)	1.6
Working width (inch)	63
Max. Working depth (mm)	350
Max. Working depth (inch)	14
Working speed at hole spacing 65 mm (km h)	0.85
Working speed at hole spacing 2 1 2 inch (mph)	0.55
Weight (kg)	870
Weight (lbs)	1914
Hole distance with 12 mm tines (mm)	65
Hole distance with 1 2 x 6 inch tines (inch)	2.5
Hole distance with 18 mm tines (mm)	130
Hole distance with 3 4 x 9 inch tines (inch)	5
Hole spacing distance driving direction (mm)	25 - 195
Hole spacing distance driving direction (inch)	1 - 7-1/2
Max. Diameter solid tine (mm)	24 x 350
Max. Diameter solid tine (inch)	1 x 14
Max. Diameter hollow tine (mm)	32 x 300
Max. Diameter hollow tine (inch)	1-1/4 x 12
Min. Tractor HP required	35
Min. Lifting capacity 610 mm behind the lifting eyes (kg)	1050
Min. Lifting capacity 24 inch behind the lifting eyes (lbs)	2310
Max. capacity with spacing 65 mm (m² hr)	1360
Max. capacity with spacing 2 1 2 inch (ft² hr)	12300
Three-point hitch	3-point CAT 1
Rpm Max.	500
Gear case oil	80W90 - 5
Lubricant	EP 2
Slip clutch setting	800 Nm