


Verti-Drain® 7626

The 7626 is the largest Verti-Drain in the range, with a heavy-duty gearbox & hydraulic depth control to allow for working depth changes on the move. It is well suited to the toughest of soil conditions, with a 102"/260 cm working width it has the ability to cover large areas with ease.

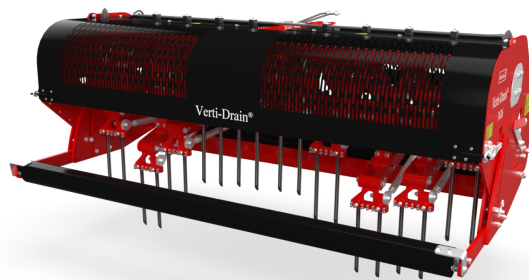

Specifications

| | |
|---|-----------------|
| SKU | S0001508 |
| Operation | Tractor Mounted |
| Working width (m) | 2.6 |
| Working width (inch) | 102 |
| Max. Working depth (mm) | 400 |
| Max. Working depth (inch) | 16 |
| Working speed at hole spacing 65 mm (km h) | 0.75 |
| Working speed at hole spacing 2 1 2 inch (mph) | 0.47 |
| Weight (kg) | 2010 |
| Weight (lbs) | 4431 |
| Hole distance with 12 mm tines (mm) | 65 |
| Hole distance with 1 2 x 6 inch tines (inch) | 2.5 |
| Hole distance with 24 mm tines (mm) | 129 |
| Hole distance with 1 x 16 inch tines (inch) | 5 |
| Hole spacing distance driving direction (mm) | 50-195 |
| Hole spacing distance driving direction (inch) | 2 - 7-1/2 |
| Max. Diameter solid tine (mm) | 24 x 400 |
| Max. Diameter solid tine (inch) | 1 x 16 |
| Max. Diameter hollow tine (mm) | 32 x 300 |
| Max. Diameter hollow tine (inch) | 1-1/4 x 12 |
| Min. Tractor HP required | 65 |
| Min. Lifting capacity 610 mm behind the lifting eyes (kg) | 2300 |
| Min. Lifting capacity 24 inch behind the lifting eyes (lbs) | 5070 |
| Max. capacity with spacing 65 mm (m ² hr) | 1950 |
| Max. capacity with spacing 2 1 2 inch (ft ² hr) | 20989 |
| Three-point hitch | 3-point CAT 2 |
| Rpm Max. | 500 |
| Gear case oil | 80W90 - 6.5 |
| Lubricant | EP2 |
| Slip clutch setting | 1100 Nm |